## SERIES X RETRO-GRATE™

## STANDARD FEATURES:

• 300 LBS. PER SQ. FT. LOAD RATING (1464 KG PER SQ. METER LOAD RATING)

• ALUMINUM "I" BAR CONSTRUCTION

•T-316 STAINLESS STEEL HARDWARE

• SPRING LOADED LIFTING HANDLE

•LOCKABLE WITH OWNER SUPPLIED PADLOCK

• EASY TO INSTALL REGARDLESS OF COVER

MANUFACTURER


•HINGED WITH AUTO-LOCK T-316 STAINLESS STEEL HOLD OPEN ARM AND RELEASE HANDLE

 VIEWING AREA FOR OBSERVATION AND LIMITED MAINTENANCE

•SUPPLIED WITH T-316 STAINLESS STEEL MOUNTING HARDWARE

SAFETY ORANGE POWDER COAT FINISH

• 3 YEAR GUARANTEE

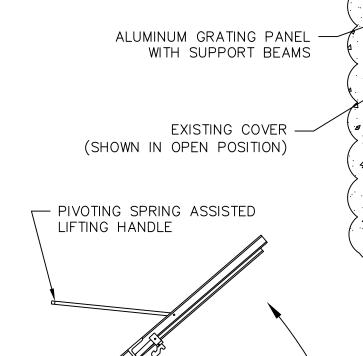

www.HallidayProducts.com Phone: (800) 298-1027 Local: (407) 298-4470 Sales@HallidayProducts.com

HALLIDAY PRODUCTS

S.STL. & ALUM. POSITIVE LOCKING HOLD OPEN ARM

SUPPORT BRACKETS (4) WITH MOUNTING **HARDWARE** 

## APPLICATIONS:

THE SERIES X RETRO-GRATE IS A HINGED ALUMINUM GRATING PANEL THAT IS EASILY INSTALLED BENEATH EXISTING ACCESS COVERS REGARDLESS OF THE ORIGINAL COVER MANUFACTURER. THE RETRO-GRATE PROVIDES ADDITIONAL PROTECTION AGAINST FALL THROUGH ACCIDENTS WHEN THE COVER IS LEFT IN THE OPEN POSITION. THE UNIT IS LOCKABLE BY AN OWNER SUPPLIED PADLOCK AND INCORPORATES A SPRING ASSISTED LIFTING HANDLE THAT POSITIONS THE HANDLE NEAR THE SLAB LEVEL. THE UNIT IS SUPPLIED WITH T-316 STAINLESS STEEL MOUNTING HARDWARE AND AN AUTOMATIC HOLD OPEN ARM WITH ALUMINUM RELEASE LATCH. THE RETRO-GRATE IS DESIGNED TO BE INSTALLED BY MOUNTING THE SUPPORT BRACKETS TO EITHER THE EXISTING FRAMEWORK OR TO THE CONCRETE SLAB BELOW THE FRAMEWORK.